


Sealife®


Flex-Connect™ Arm Conversion Kit for SL961/SL980 (Item SL993)

Installation Instructions



What's included: Flex-Connect adapter, large washer, small washer, lock washer and bolt.

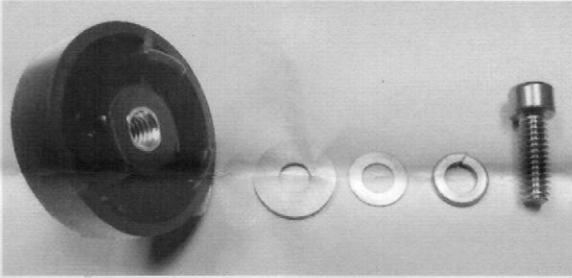


Step 1: Firmly grab base of arm and tray, and bend until bottom link separates

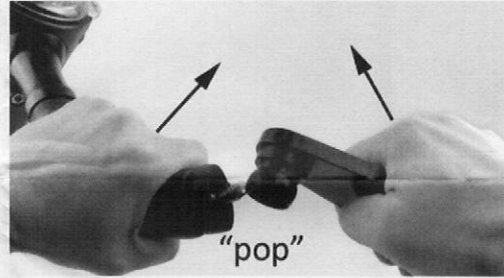


Step 2: Use Allen wrench (screw head is 3/16" or 5/32") to unscrew bottom arm link from tray.

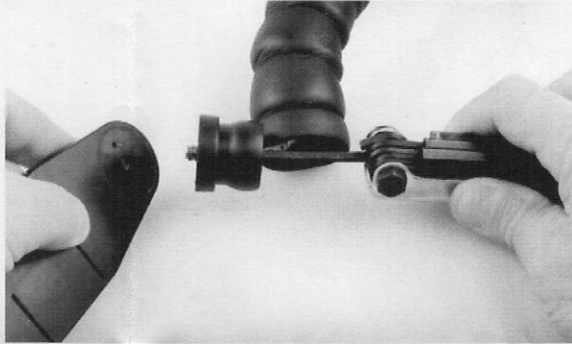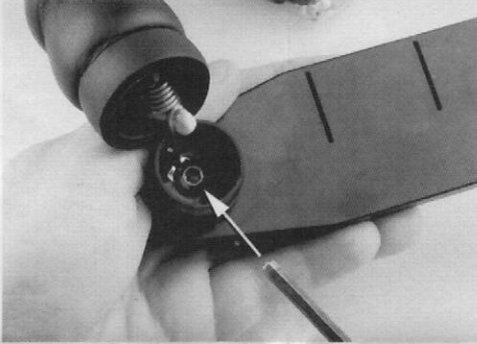


Step 3: Using the screw and washers provided, attach the bottom arm link to the Flex-Connect adapter in the order shown below. Use a 3/16" Allen Wrench.

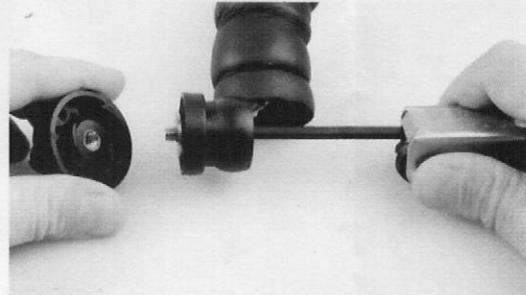

Step 4: Click the Flex-Connect adapter into the Flex-Connect tray to help with tightening the screw.

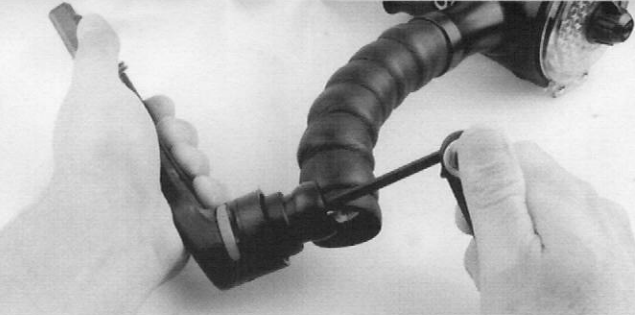

Step 5: Align the arm with the bottom arm link and push together until they snap together. Make sure not to pinch the inside safety lanyard between the links.

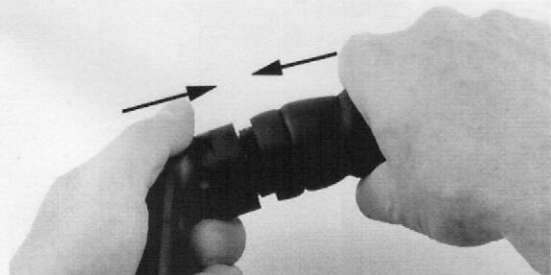

For questions, please contact Sealife at (856) 866-9191, info@Sealife-cameras.com or www.sealife-cameras.com